HSF

NOTES:
Rated Current:1.0AMP.
Contact Resistance:20mΩ Max.
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min.
Operation Temperature:−40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:PA9T+30%G.F UL94V−0 BK

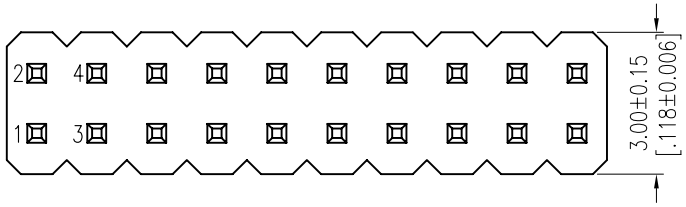

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

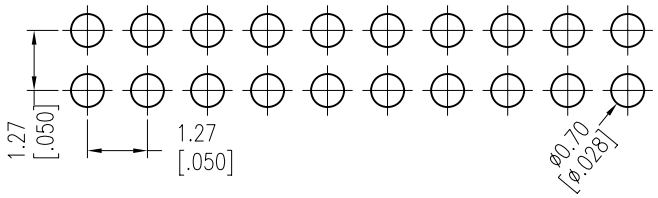

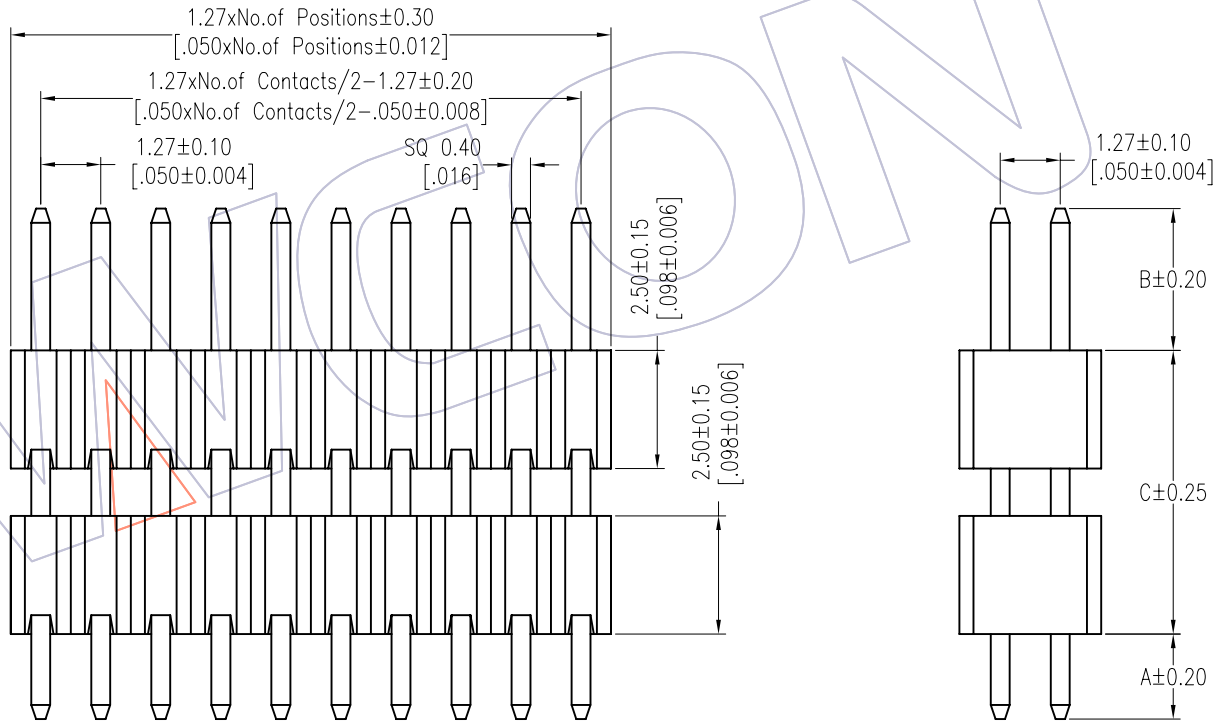

Ordering Information

1325-22 XX XX S XXX X 1

No.of Pins	Contact Plating	Pin Length	Packing
Per Row:02~50	G0=Gold Flash	L=A+B+C	A=Tray
	G3=10u"Gold	Standard:	T=Tube
	G4=15u"Gold		
	G5=30u"Gold		
	S0=Gold Flash/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		

Item	Pin Lenght	A	B	C	Mating
Standard	---	1.80	1.90	---	2321
	---	1.80	3.00	---	2334
	---	1.80	4.00	---	2344
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/03/31	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	William Chen	DATE	2012.03.31
CHECK		DATE	
APPROVE		DATE	

SCALE	Fit
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 1325-22XXXXSXXXXX

TITLE: PH1.27 DUAL ROW DOUBLE PLASTIC 180° H=2.5

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com