

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0






Ordering Information

2263 - 2 XX Z XX D Y N X 1


No. of Pins per ROW: 02-40PIN
 Contact Plating: G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
 SM=Mate Tin

Insulator: D=L,CP
 Packing: T=Tube
 R=Reel

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

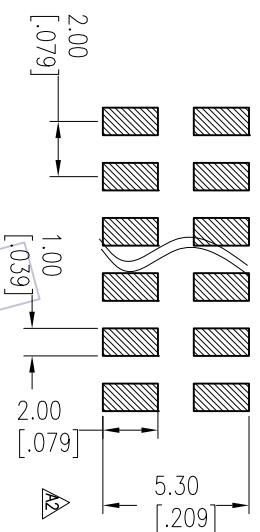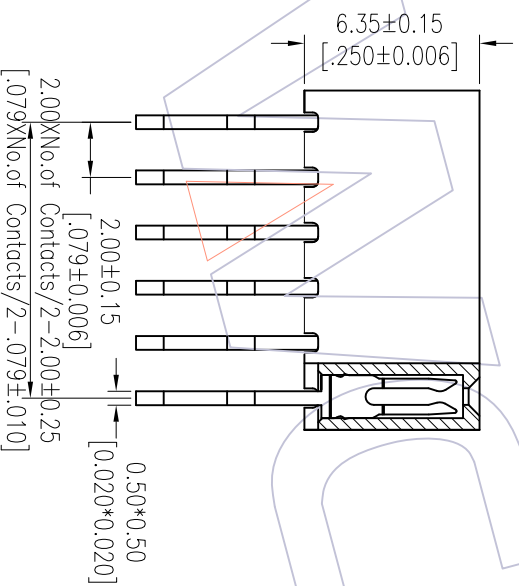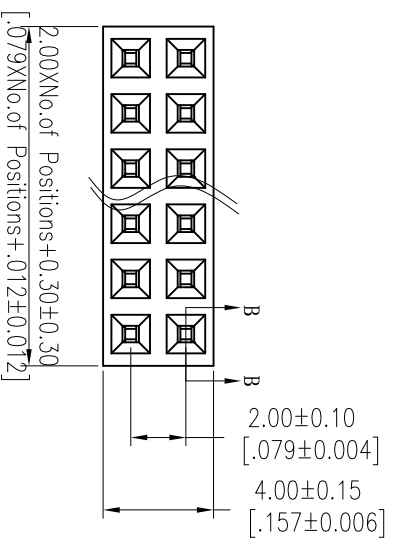

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

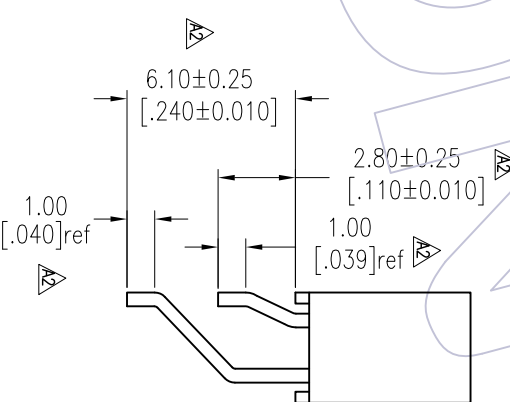

REV	DATE	MODIFICATION DESCRIPTION
A0	2012/09/12	NEW
A1	2013/03/15	Modify drawing
A2	2013/04/29	Modify drawing 6.95 → 6.10, 3.40 → 2.80

OPERATION	DRAW	DATE	SCALE	FIT
XX	Wang	2013/04/29	UNIT	mm
XXX	CHECK	DATE	SIZE	A4
XXXX	±0.15	DATE	SHEET	1/1
Angle	± 3'	APPROVE	PROJ.	
DIM	TOL			

PART NO.	2263-2XXXXXXDYNX1
TITLE:	FH2.00mm DOUBLE ROW 90° SMT
	H=6.35
Customer NO.	

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com